A NEW APPROACH FOR THE TRUST CALCULATION IN SOCIAL NETWORKS

Mehrdad Nojoumian, Timothy C. Lethbridge
School of Information Technology and Engineering, University of Ottawa, Ottawa, ON, K1N 6N5
mnojoumi@site.uottawa.ca, tcl@site.uottawa.ca

Keywords: Trust, Reputation, Social Networks.

Abstract: This paper aims at the trust calculation in social networks by addressing some major issues: Firstly, the paper evaluates a specific trust function and its behaviors, and then it focuses on the modification of that trust function by considering diverse scenarios. After that, the paper proposes a new approach with a specific functionality. The main goals are to support good agents strongly, block bad ones and create opportunities for newcomers or agents who want to show their merit in our society although we can not judge them. Finally, a mathematical discussion by a new trust function is provided with ultimate results.

1 INTRODUCTION

One of the major challenges for electronic commerce is how to establish a relationship of trust between different parties and how to form a reputation scheme as a global vision. In many cases, the parties involved may not ever have interacted before. It is important for participants such as buyers, sellers and partners to estimate each other's trustworthiness before initiating any commercial transactions.

According to (Mui, 2002), "*Trust*" is a personal expectation an agent has about another's future behavior, it is an *individual quantity* calculated based on the two agents concerned in a present or future dyadic encounter while "*Reputation*" *is* perception that an agent has of another's intentions, it is a *social quantity* calculated based on actions by a given agent and observations made by others in a social network. From the cognitive point of view (Castelfranchi and Falcone, 1998), trust is made up of underlying beliefs and it is a function of the value of these beliefs.

about sellers for which the original buying agent has no information. This system allows for a *decentralized* approach whose strengths and weaknesses lie between the personal and public reputation system.

For creating a *"reputation model"*

centralized authorities, it can help agents evaluate the trustworthiness of such authorities too.

To facilitate trust in commercial transactions *"Trusted Third Parties"* (Rea and Skevington, 1998) are often employed. Typical TTP services for electronic commerce include certification, time stamping, and notarization. TTPs act as a bridge between buyers and sellers in electronic marketplaces. However, they are most appropriate for closed marketplaces. Another method is from *"Social Interaction Framework (SIF)"* (Schillo et al., 2000). In SIF, an agent evaluates the reputation of another agent based on direct observations as well through other witnesses.

Breban and Vassileva (2001) present a *"Coalition Formation Mechanism"* based on trust relationships. Their approach extends existing transaction-oriented coalitions, and might be an interesting direction for distributed reputation management for electronic commerce. Tan and Thoen (2000) discuss *the trust that is needed to engage in a transaction.* In their model, a party engages in a transaction only if its level of trust exceeds its personal threshold. The threshold depends on the type of the transaction and the other parties involved in the transaction.

In (Yu et al., 2004) an agent maintains a model of each acquaintance. This model includes the acquaintance's *reliability* to provide high-quality services and *credibility* to provide trustworthy ratings to other agents. Marti and Garcia-Molina (2004) discuss the effect of reputation information sharing on the *efficiency and load distribution of a P2P system*, in which peers only have limited or no information sharing. In their approach, each node records ratings of any other nodes in a reputation vector. Their approach does not distinguish the ratings for service (reliability) and ratings for voting (credibility) and does not consider how to adjust the weight for voting.

Aberer and Despotovic (2001) use a model to manage trust in a P2P network where no central database is available. Their model is based on *"Binary Trust"*. For instance, an agent is either trustworthy or not. In case a dishonest transaction is detected, the agents can forward their complaints to other agents. Recently, a new P2P reputation system is presented in (Song et al., 2005) based on *"Fuzzy Logic Inferences"* which can better handle uncertainty, fuzziness, and incomplete information in peer trust reports. They demonstrate the efficacy and robustness of two P2P reputation systems (*FuzzyTrust* and *EigenTrust*) at establishing trust among the peers.

In the next section, we evaluate the behavior of the proposed trust function in (Yu and Singh, 2000) and offer a new approach for the trust calculation.

3 TRUST FUNCTION

In this section, we evaluate a specific trust function by Yu and Singh (2000) and assess its behavior. In the proposed scheme, after an interaction the updated trust rating T_{t+1} is given by the following formulas (Table 1) and depends on the previous trust rating where:

$\alpha >= 0,\ \beta <= 0$

Table 1: Trust function from (Yu and Singh, 2000)

T_t	**Cooperation**
> 0	$T_t + \alpha (1-T_t)$
< 0	$(T_t + \alpha)/(1-\min\{\lvert T_t\rvert, \lvert \alpha \rvert\})$
= 0	α
T_t	**Defection**
> 0	$(T_t + \beta)/(1-\min\{\lvert T_t\rvert, \lvert \beta \rvert\})$
< 0	$T_t + \beta\ (1+T_t)$
= 0	β

The following diagram (Figure 2) shows the behavior of the Yu trust function, it is convergent at points (+1, +1) and (-1, -1). The above curve is for the cooperation and the other one is for the defection. This function also crosses axis Y at the following points: α =0.1 and β =-0.2 where T_t is equal to zero.

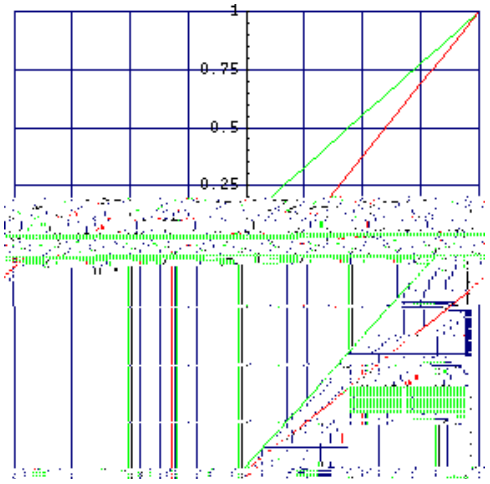

Figure 2: Yu trust function diagram (α =0.1 & β =-0.2)

3.1 Evaluation of the Yu trust function

To see the exact properties of the Yu trust function, refer to the Table 2, which shows T_t and its corresponding value (T_{t+1}) in the interval [-1, +1].

T_t	Plus	T_{t+1}	T_t	Minus	T_{t+1}
1	0	1	1	0	1
0.9	0.01	0.91	0.9	-0.03	0.87
0.8	0.02	0.82	0.8	-0.05	0.75
0.7	0.03	0.73	0.7	-0.08	0.62
0.6	0.04	0.64	0.6	-0.1	0.5
0.5	0.05	0.55	0.5	-0.13	0.37
0.4	0.06	0.46	0.4	-0.15	0.25
0.3	0.07	0.37	0.3	-0.18	0.12
0.2	0.08	0.28	0.2	-0.2	0
0.1	0.09	0.19			
			0.16	-0.21	-0.06
0	0.1	0.1	0.12	-0.21	-0.09
			0.08	-0.21	-0.13
-0.02	0.1	0.08	0.04	-0.21	-0.17
-0.05	0.1	0.05			
-0.08	0.1	0.02	0	-0.2	-0.2
-0.1	0.1	0	-0.1	-0.18	-0.28
-0.2	0.09	-0.11	-0.2	-0.16	-0.36

Therefore, this paper's major critique is for cooperation in scenario "a" and defection in scenario "d". They show bad behaviors of the trust function. In the next section, a sample improved function is provided to modify the trust calculation for the social networks.

3.2 Modification of the trust function

To modify the trust function in (Yu and Singh, 2000), we consider six possible situations (Table 3). If trust value is less than β then the agent is a *bad* participant, if it is greater than α then the agent is a *good* member of the society, otherwise ([β , α]) we can not judge the agent. We just suppose it is a member who is looking for some opportunities. By considering both cooperation and defection factors, we have the following rules:

(1) If a bad agent cooperates, then we *encourage* it a little bit, e.g. by the factor $X_E \in (0.01, 0.05)$

(2) If we encounter with an agent who is looking for a chance by cooperating, then we *give it some opportunities* by the factor $X_{Give} = 0.05$

(3) If a good agent cooperates, then we *reward* it more than the encouragement factor:
$X_R \in (0.05, 0.09) > X_E \in (0.01, 0.05)$

(4) If a good agent defects, then we *discourage* it a little bit, e.g. by the factor $X_D \in (-0.05, -0.01)$

(5) If we encounter with an agent that we can not judge it while it is defecting, then we *deduct its credit value* by the factor 66c 0.2<008F 3)h Tw T* 0 0 10.02 202.92 3c 0.0481 Tw [323t is, th[.00219.90(07 Tc e w 2.892 (

4 RESULTS

In this part, a detailed evaluation of the new trust function with its regression is presented. First of all look at the Figure 5. It illustrates the behavior of the new function in cooperation situations. This diagram shows the value that trust function adds to the trust value each time according to the following scheme:

[-1, β)	Ą	*Encourage*
[β, α]	Ą	*Give Opportunities*
(α, +1]	Ą	*Reward*

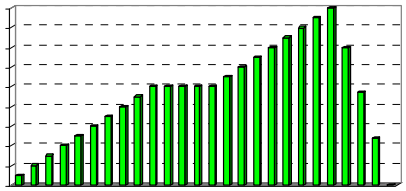

is to evaluate social behaviors of agents by considering both functions at the same time and apply a two dimensional function for this assessment.

6 ACKNOWLEDGEMENTS

We appreciate the anonymous reviewers for their comments.

REFERENCES

Yu, B. and Singh, M. P., 2000. A social mechanism of reputation management in electronic communities. In *Proceedings of Fourth International Workshop on Cooperative Information Agents*. pages 154–165.

Marti, S. and Carcia-Molina, H., 2004. Limited reputation sharing in P2P systems. In *Proceedings of the ACM Conference on Electronic Commerce.* pages: 91-101.

Yu, B. and Singh, M. P., 2002. Distributed reputation management for electronic commerce. *Computational Intelligence*, 18 (4): 535–549.

Mui, L., 2002. Computational models of trust and reputation". *PhD thesis in Electrical Engineering and Computer Science, MIT.*

Yu, B., Singh, M. P. and Sycara, K., 2004. Developing trust in large-scale peer-to-peer systems. In *First IEEE Symposium on Multi-Agent Security and Survivability.*

Yolum, P. and Singh, M. P., 2004. Service graphs for building trust. In *Proceedings of the International Conference on Cooperative Information Systems*, (1): 509-525.

Yu, B. and Singh, M. P., 2003. Searching social networks. In *Proceedings of the 2nd International Joint Conference on Autonomous Agents and Multi-Agent Systems (AAMAS)*, ACM Press.

Song, S., Hwang, K., Zhou, R. and kwok, Y., 2005. Trusted P2P transactions with fuzzy reputation aggregation. *IEEE Internet Computing*, 9 (6): 24-34.

Sabater, J. and Sierra, C., 2002. Reputation and social network analysis in multi-agent systems. In *Proceedings of First International Joint Conference on Autonomous Agents and Multi-agent Systems*, pages 475–482.

Pujol, J. M., Sanguesa, R. and Delgado, J., 2002. Extracting reputation in multi-agent systems by means of social network topology. In *Proceedings of First International repun Td(InternTf0 Tc 0 Tw 5.9 0 Td( )5R[(Prlm9Tc [(Pujol,)-7(J. M., Sang9IEEE)Td*